


1. No screws other than Simpson SDS screws may be used to fasten hangers.
2. All bolts must have washers, and shall not be overdriven.
3. If using engineered lumber, a span table must be submitted with application.
4. Multiple worksheets may be provided for separate portions of deck.
5. A water proof GFCI receptacle is required to serve new decks.

Width of this portion of the deck \_\_\_'-\_\_\_" Length From House \_\_\_'-\_\_\_" Height \_\_\_'-\_\_\_"

Will you need to make a new opening, or widen an existing opening in the house \_\_\_\_\_  
 If yes, a separate drawing with headers and tributary area details must be provided.

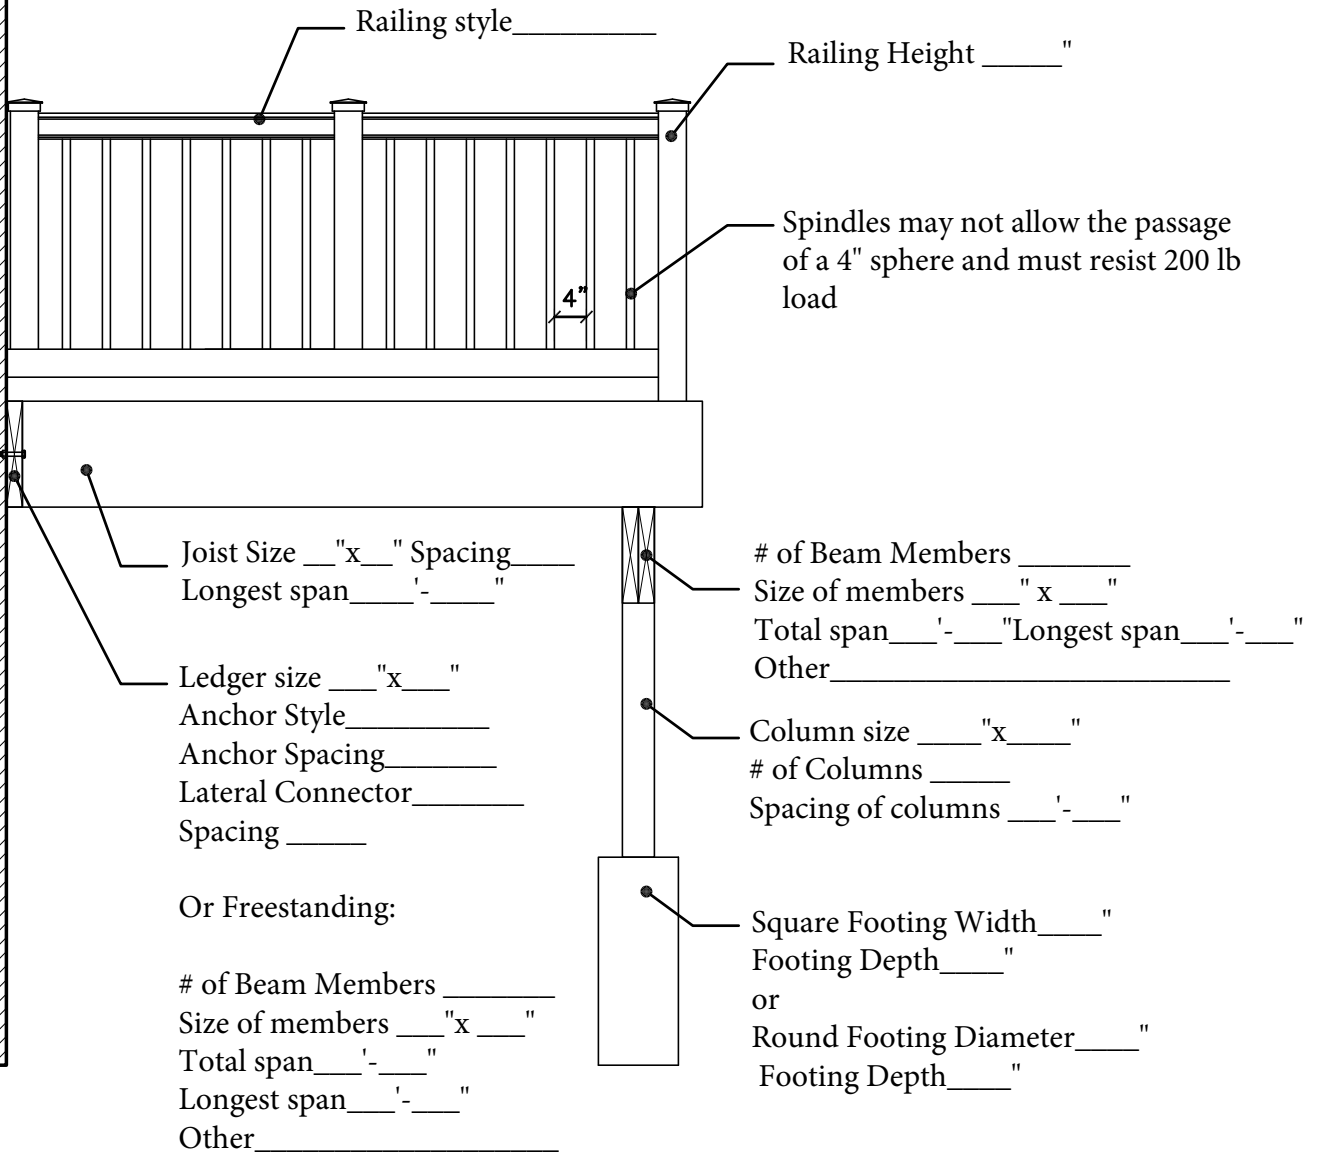

If steps are provided, how many are there \_\_\_\_\_ How wide are the steps \_\_\_'-\_\_\_"  
 Tread depth \_\_\_\_\_" Riser height \_\_\_\_\_" What is the stringer(support) spacing \_\_\_\_\_